



RUDDER ANGLE CONVERTER RC 02

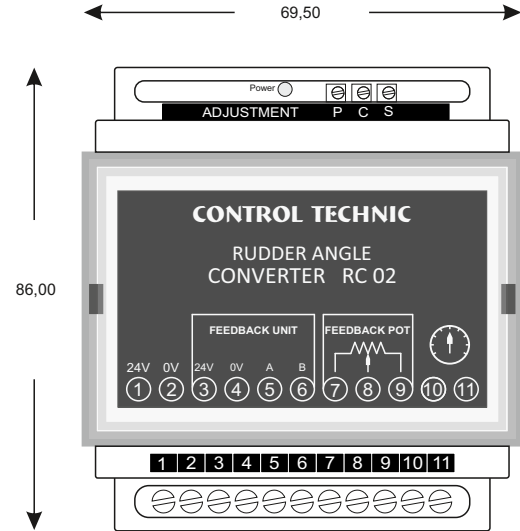


BENEFITS

- Internal Galvanic Isolated Power Supply
- Reverse Polarity Protection
- Output Short Circuit Protection
- 50mA Output Drive
- Independant Adj. For Port , Stbd , Center
- DIN EN 60715 Mounting Rail 35x7,5
- +/- 10V Out to Fit Most Indicators
- Easy Installation And Replacement

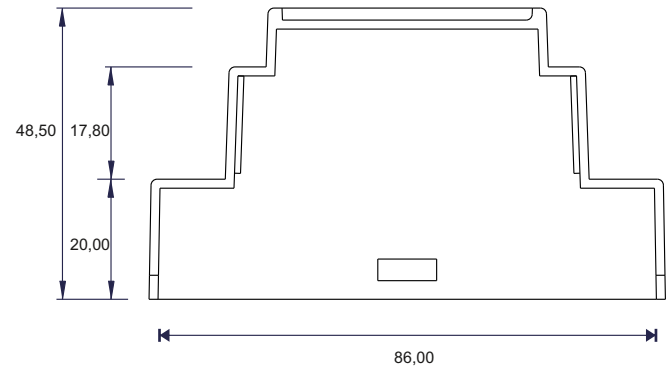

TECHNICAL DETAILS

Power Supply	:	24V DC
Power Consupion	:	40mA
Output Voltage	:	+/- 10V DC
Max. Output Current	:	50mA
Max. Indicator Drive	:	5 Pcs (10mA Each Indicator)
Feedback In. Type 1	:	DZ 319 , +/- 10V , 45-0-45°
Feedback In. Type 2	:	1-5 K.Ohm Pot.Meter
Weight	:	75,0 g

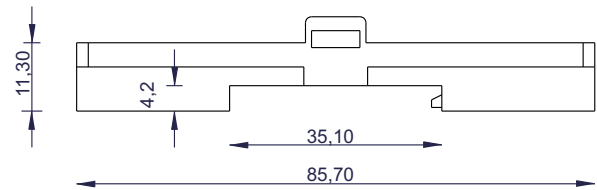

Dimensions in mm